


Electrical Specifications

Center Frequency: 70.455000 MHz
3 dB BW: $f_0 \pm 7.5$ KHz Min.
40 dB BW: $f_0 \pm 30$ KHz Max.
Passband Ripple: 1.0 dB Max.
Insertion Loss: 3.0 dB Max.
Guaranteed Attenuation: 85 dB Min.
Spurious: 20db Min.
Package Type: UM-1
Operating Temperature: -30 to +60°C

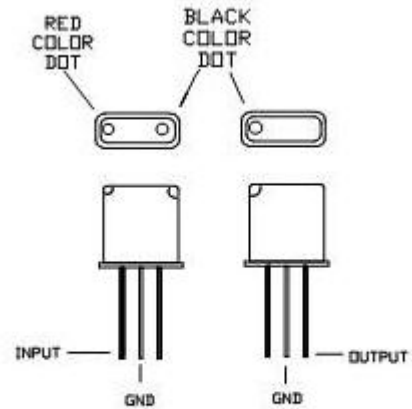

COLOR ORIENTATION - MECHANICAL

Dimensions

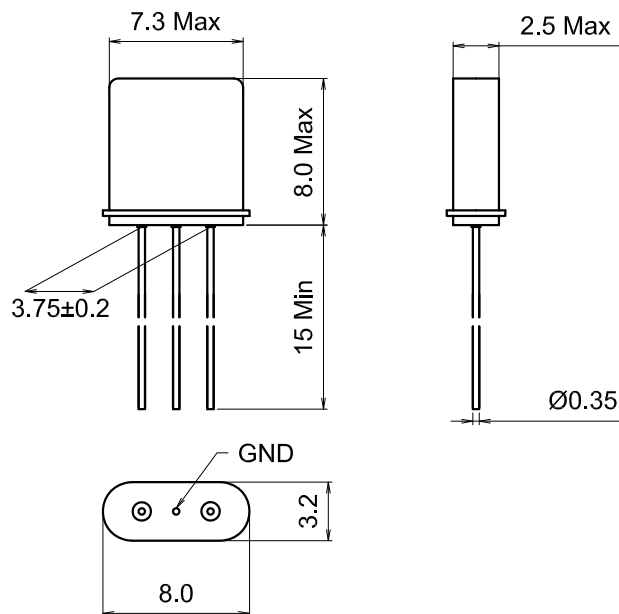


Figure 1) Top Side and Bottom Views